


Single Phase Meter Enclosure

TY-ME15B1

Brief Introduction

TY-ME15B1 Single phase meter enclosure is specially designed for the purpose of anti-tamper and protection of meter. One BS type meter and one 2P MCB can be mounted with bottom connection. The enclosure is with transparent window, transparent/non- transparent top cover and non-transparent base. The material of enclosure is polycarbonate with UV resistance and V0 frame resistance degree. Pole mounted or wall mounted or lock and key protection are based on project demand. Alarm sensor for enclosure opening is reserved function.

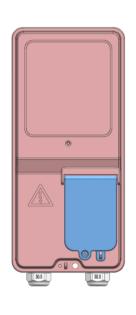




Specification

Items	Parameters
Dimension	L380.1mm*W175.2mm*H110.8mm
Material of top cover	PC+10%GF non- transparent/PC transparent
Material of turnover window	PC transparent
Material of base	PC+10%GF non- transparent
Protection degree	IP54, IK10
Anti-UV	Yes
Flame resistance degree	V0
Anti-tamper protection	Seal and padlock for cover and seal for windows
Method of production	Injection
Temperature	-30℃ to 80℃
Heat dissipation	No ventilation hole for cooling
Installation provision for MCB	Yes
Mounting methods	Pole mounted by stainless steel strap or wall mounted by screw
Thickness	Top cover 2mm, base 2mm, window 1.9mm


Noted: Material can be customized

Dimension

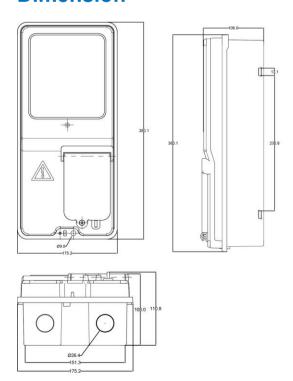



Components

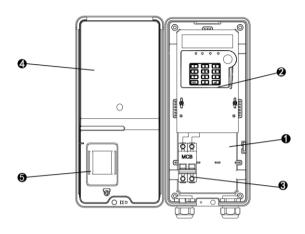

- 0 Base
- 0 Energy meter
- € MCB
- 4 Up cover
- 0 Turnover window for MCB

Installation Methods





Wall installation

Pole installation

Installation Accessories

Option installation accessories (cost will be different based on the accessories) :



2PCS PG19/M25



2PCS Rubber plug



4PCS M8*40mm Expand plug 4PCS ST5*35mm Self-tapping screw



3PCS ST4*12mm Self-tapping screw



2PCS 800*12*0.25mm Stainless steel strap

Quantity in Different Containers

Containers	Quantity
20GP	3588
40HQ	8316

Each meter enclosure is packed in a plastic bag, then in a carton, the carton is sealed by tape and tie.