



Three Phase Meter Enclosure

TY-ME33

Brief Introduction

TY-ME33 single phase meter enclosure is specially designed for the purpose of anti-tamper and protection of meter. 1(One) pcs BS type meter or Maximum 4(Four) pcs DIN rail type meters can be mounted with bottom connection. The enclosure with transparent/non-transparent top cover and non-transparent base. The material of enclosure is polycarbonate with UV resistance and V0 frame resistance degree. Pole mounted or wall mounted or lock and key protection are based on project demand. Alarm sensor for enclosure opening is reserved function.






Specification

Items	Parameters
Dimension	L519.1mm*W298.7mm*H133mm
Material of top cover	PC+10%GF non-transparent/ PC transparent
Material of base	PC+10%GF non-transparent
Protection Degree	IP55, IK10
Anti-UV	Yes
Flame resistance degree	V0
Installation provision for MCB	Yes
Anti-tamper protection	Seal and padlock for cover, and seal for windows
Temperature	-30℃ to 80℃
Heat dissipation	Ventilation hole for cooling
Method of production	Injection
Mounting methods	Pole mounted by stainless steel strap or wall mounted by screw
Thickness	Top cover 2.5mm, base 3mm


Noted: Material can be customized

Dimension

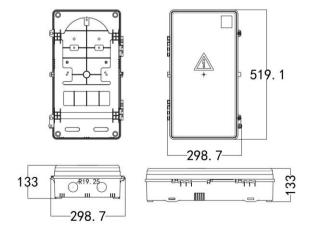




Components

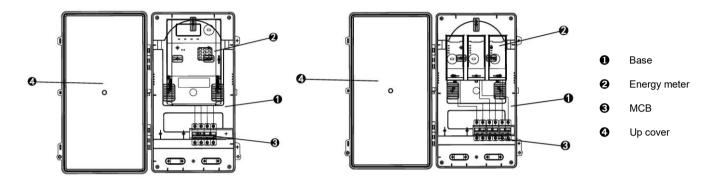

Installation Methods



Pole installation

Quantity in Different Containers

Containers	Quantity
20GP	1170
40HQ	3060

Installation Accessories

Option installation accessories (cost will be different based on the accessories) :



Each meter enclosure is packed in a plastic bag, then in a carton, the carton is sealed by tape and tie.